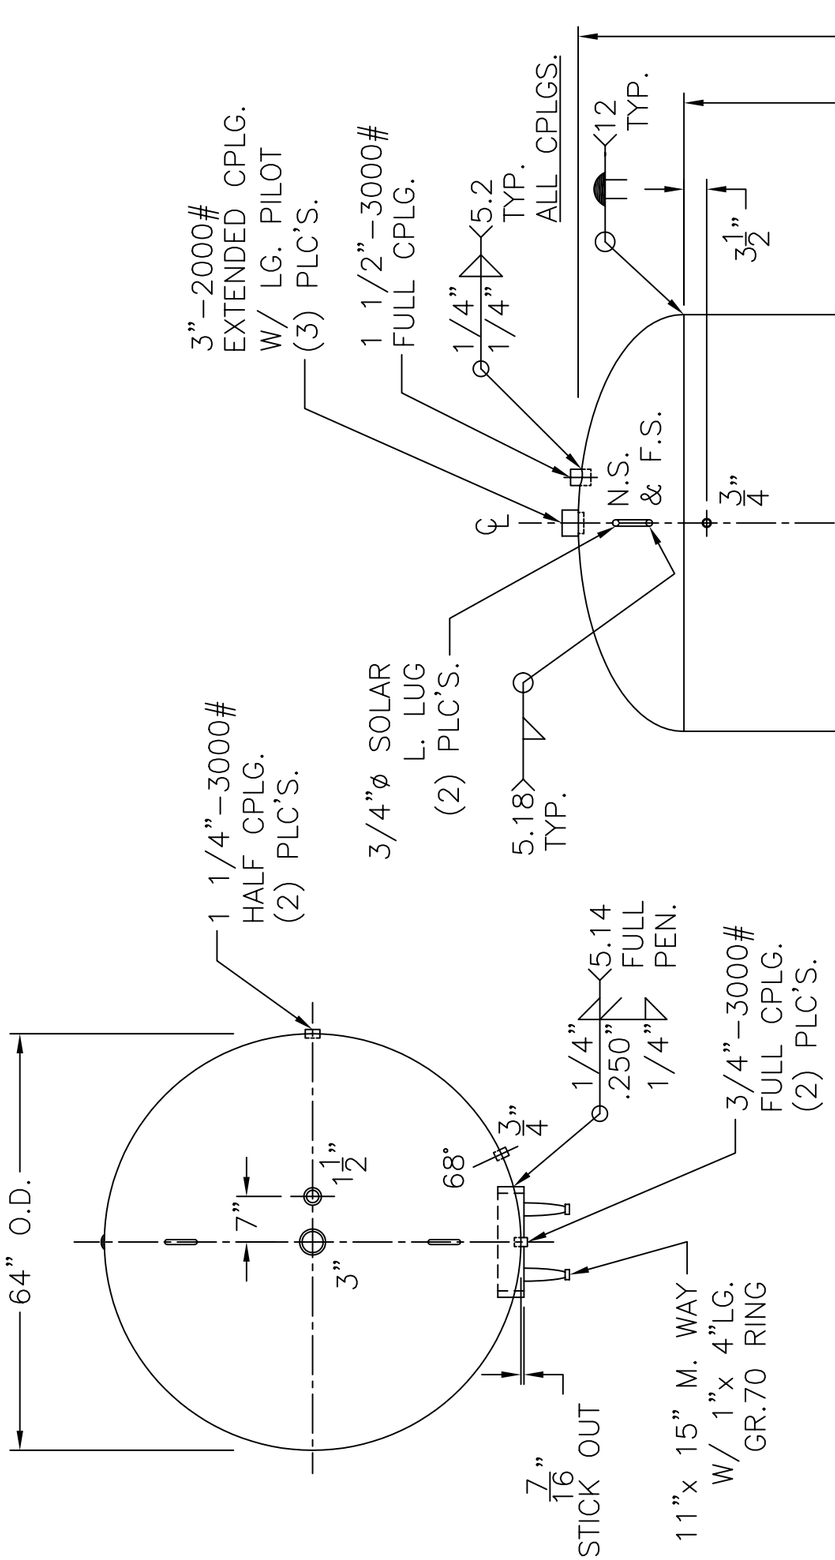

4) 10–1–04 PROOF TEST.
3) EXTEND ALL CPLGS. 5/8" INSIDE.
2) HYDRO @ 240 PSIG.
NOTE: 1) SEAL ALL OPENINGS TO KEEP CEMENT MOIST TO PREVENT CRACKING.

SHELL / HEADS: .248" SA–455 2:1 S.E. (.216" MIN.)	CS–64–1650–V
SHELL: .250" SA–455	REV. 10–6–04
M.A.W.P. 160 PSIG. @ 210 °F	DATE: 7–23–01
ASME. SECTION IV 2001 ADD. 2003	FOR: HANSON STANDARD VERT. WATER TANK
X–RAY: RT–NO / H.L.W.	197.2 SQ. FT. SURFACE AREA. THIS TANK IS SHIPPED WITH ALL OPENINGS SEALED. THE CEMENT LINING MUST BE KEPT MOIST BEFORE, DURING, AND AFTER INSTALLATION TO PREVENT CRACKING OF THE CEMENT.
GALLONS: 1650 WT. 3764 LBS.	INSIDE: CEMENT LINED
SERIAL NO.	OUTSIDE: PRIME
N.B.	(1584) LEG–ZONE 4–15 KM.
	CAD–"B" UNDER "STD"–SERIES
	BY: J.G. SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
1924 COMPTON AVE.
LOS ANGELES, CA 90011